

NEW FEED

High Power 10mm PCB Strip to Wire connector - 1 m Lead



Our innovative Mini connectors are compatible with all single colour 10mm strips and designed to fit into even the slimmest aluminium extrusions.

These New Feed connectors are used to create a new run; simply insert the strip into the corresponding terminals and crimp with pliers to pierce PCB components for a secure finish- **see page 2 for full instructions.**

PRODUCT SPECIFICATION


COMPATIBLE STRIP SERIES (IP20):	Linear High Power Dim to Warm Ultra Run
STRIP PCB WIDTH:	10mm
VOLTAGE RANGE:	DC 3-24V
MAX LOAD RATING:	125W (24V)
WIRE ACCEPTED:	Pre-Flexed with a 1 m lead (Red & Black)
DIMENSIONS:	L15.6*W11.6*H3.3mm
PRODUCT REFERENCE:	FLSW10SMLHP

NEW FEED

High Power 10mm PCB Strip to Wire connector - 1 m Lead


USING A NEW FEED CLIP CONNECTOR

Our new feed connectors eliminate the need for soldering, please follow the steps explained below:

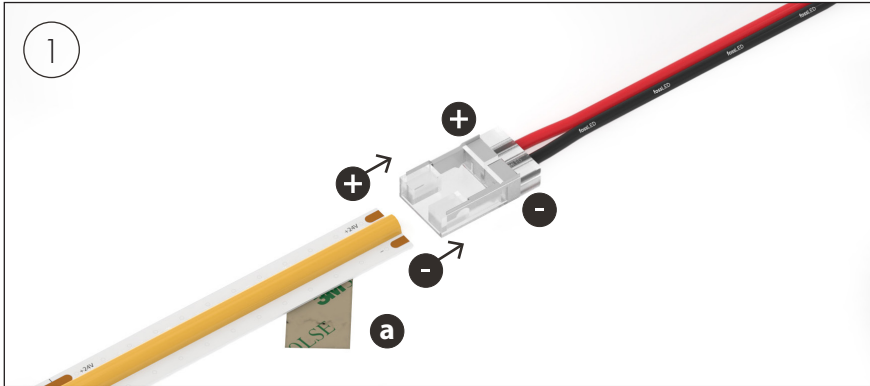


a Peel back the adhesive tape leaving a sufficient amount of bare strip to insert into the clip. Make sure you peel back the tape and accompanying adhesive layer leaving this to re-apply once the connection is complete.

+ **-** Align the LED Strip ensuring the polarities match with the feed cable.

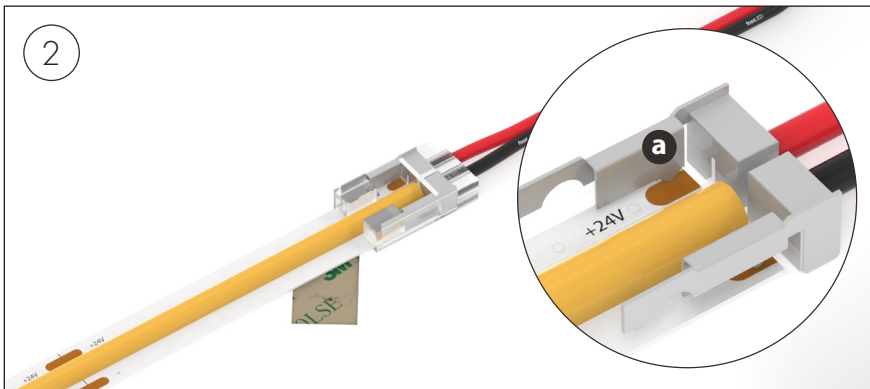

a Insert the LED Strip into the corresponding terminals ensuring the strip is fitted correctly so that the copper pads line up with the clip connector teeth.

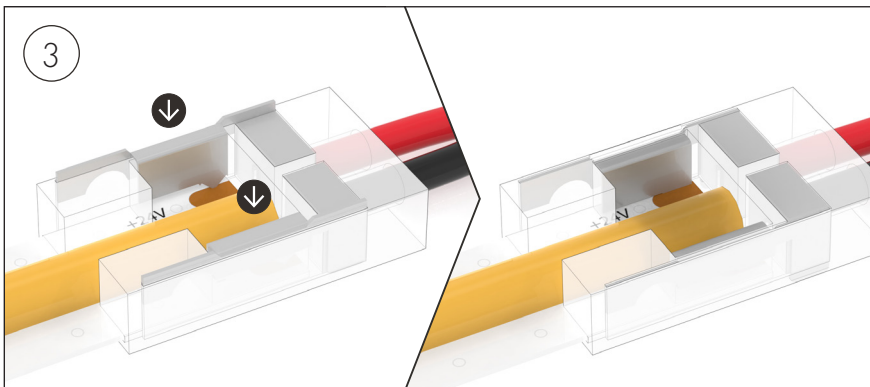

↓ Crimp down on the teeth prongs with pliers to pierce your LED Strip PCB leaving the prongs flush with the connector housing. Check the LED Strip is locked in and the connection is secure.

Re-apply the adhesive tape under the clip connector ready for installation.

Note: Care must be taken when crimping so as not to crack the outer housing.