


STRIP to STRIP CONNECTOR

12mm Single Colour Solderless Straight Connector




Streamline your installation with our Strip to Strip Connectors. No soldering required. Designed for seamless compatibility with fossLED 12 mm Single Colour ECO and LINEAR strips, these connectors provide a fast, professional finish.

Simply insert both LED strips into the terminals and clamp with pliers to pierce the PCB for a reliable, long-lasting connection.
Full installation guide available on page 2.

PRODUCT SPECIFICATION

Voltage range:	DC 3-24 V
Max current of pin:	5.5A (132W Max in 24 V DC)
Dimensions:	L19.8*W14.6*H6.2mm
Environment temperature:	-10 to +45°C
Product reference:	FLSS12SN

COMPATIBLE PRODUCTS (sold separately)



Profiles

Compatible with the full fossLED aluminium profile range*
*Excludes PRO1(R), PRO2(R) and PRO6R



LED Strip

Compatible series (IP20): ECO and LINEAR
Strip type: SMD and COB (12 mm PCB)

STRIP to STRIP CONNECTOR


12mm Single Colour Solderless Straight Connector



USING A STRIP to STRIP CONNECTOR

Follow the steps below, repeating the process for each connector.

Important: Always ensure power is disconnected before making any connections.

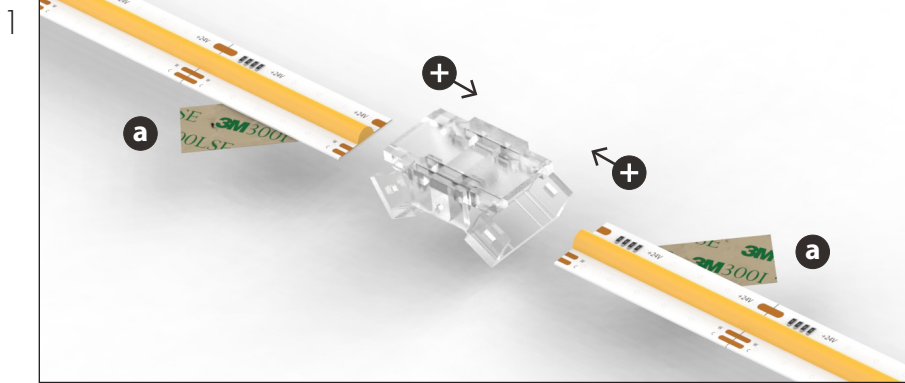

a Peel back the adhesive tape to expose enough bare strip for insertion into the connector. Ensure both the tape and adhesive layer are peeled back. These can be re-applied once the connection is complete.


+ Align the LED strips, ensuring the polarities match.



b Insert the LED strip fully into the hinged housing lid. Ensure the connector contacts are aligned with the strip's copper pads.

c Using pliers, evenly clamp down the lid to pierce the LED strip PCB. The lid will click into place, confirming the connection is secure.

Note: Take care when crimping to avoid cracking the outer housing.

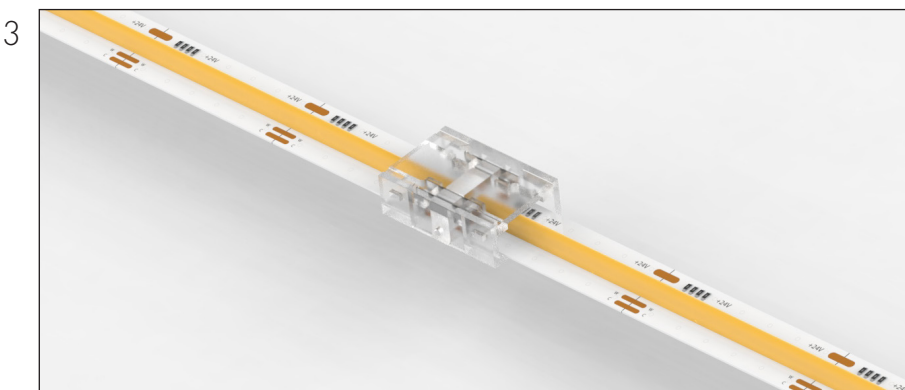

Repeat steps **b** **c** on the opposite side of the connector, double-checking polarity alignment.

Ensure both LED strips are locked in place and the connection is secure. Re-apply the adhesive tape beneath the connector, ready for installation.

Note: Test the LED strip to confirm correct operation before final installation.

Note: Images are for illustration purposes only and may not represent the exact connector model supplied.