


# IRIS

## Antiglare Modular - Black on Black



FX

ARC SERIES

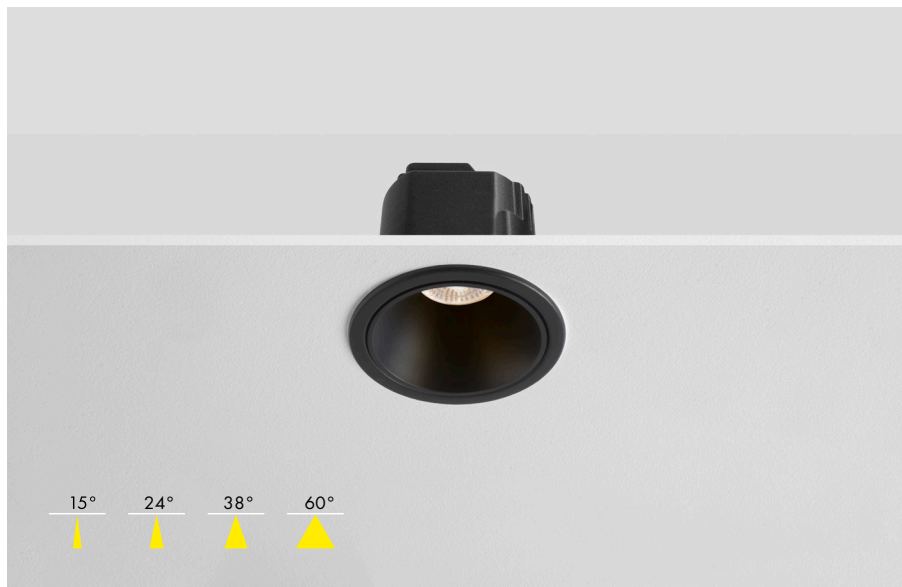

### Baffle Colour Selection

Choose from additional White, Gold or Silver Baffle covers

### Easy Installation

Mains Loop-in and Loop-out Driver feature on Standard & Mains Dimmable Models

### High CRI & Antiglare

A set back reflector for a low glare rating coupled with a powerful & Crisp light engine to help enhance the appearance of colours & objects

### Description

The IRIS Antiglare Modular is our versatile and yet elegant Fire Rated (30-60-90 minutes) LED Downlight, featuring a multitude of Beam Angles, Power Outputs, Kelvin and dimming protocol variations compliant with Part L (<95lm/w). This unit has been designed with Antiglare at the forefront of its design with its set-back reflector, producing low glare and superior visual comfort. At a Colour Rendering Index (CRI) of 95+, the IRIS offers a crisp light finish which, in turn, enhances the appearance of colours and objects it comes into contact with.

### Dimensions

Height: 81mm  
 Diameter: 80mm  
 Cut Out: 68-70mm

Wattage	10W	12W
Lumen Output	853lm	1024lm
Lumens per Watt	85.3lm/w	
Finish	RAL 9003	
Class	Class 3	

### Part code Builder

**FL420 - 11 -** add code below

Wattage	Colour Temperature	Beam Angle	Dimming	Additions
<b>3</b>	<b>G</b>	<b>38</b>	<b>S</b>	<b>EM</b>
3 - 10W 4 - 12W	G - 2700K C - 3000K N - 4000K	15 - 15° 24 - 24° 38 - 38° 60 - 60°	S - Switched R - Mains Dim Z - 0 to 10V D - DALI	EM - 3 Hour EM EMD - 3 Hour EM DALI



30, 60 and 90 Minutes Fire Rated



Insulation coverable



Compliant with Part L



Unified Glare Rating



Colour Rendering Index



IP20 Rated



Mains, 0-10V & DALI Dimmable



7 Year Domestic & 5 Year Commercial Warranty