


30W DALI-2 Dimmable Driver

DIMDA2P-3024



COM

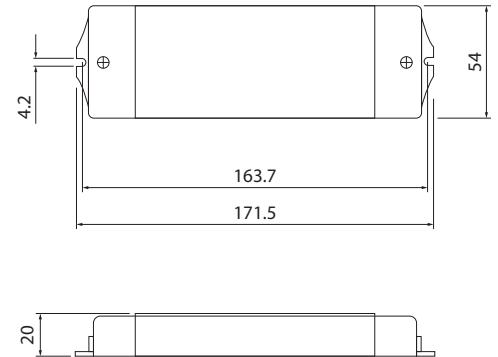

Product Reference: **DIMDA2P-3024**

The fossLED DALI-2 Dimmable Drivers are compatible with DALI and DALI-2 dimming systems with a dimming capacity of 1 - 100%; for further information please contact us on 0203 198 1908.

Technical Specification:

Output	<ul style="list-style-type: none"> Output Power DC Voltage Dimming Capacity Voltage Tolerance Rated Current 	<ul style="list-style-type: none"> 30W 24v 1-100% ±0.2% 1.25A
Input	<ul style="list-style-type: none"> Input Voltage Range AC Frequency Power Factor Efficiency AC Current Leakage Current Inrush Current 	<ul style="list-style-type: none"> 200 - 240VAC 47 - 63 Hz >0.96 >86.4% 0.42A <0.50mA 59A (Twidth=210µs 230VAC)
Environment	<ul style="list-style-type: none"> Working Temp Relative Humidity Vibration 	<ul style="list-style-type: none"> -40°C - +60°C 20 - 90% 10 - 500Hz/ 5G, 10 minutes
Safety & EMC	<ul style="list-style-type: none"> Withstand Voltage EMI Safety EMC Emission EMC Immunity 	<ul style="list-style-type: none"> I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC EN55015 Class B EN61347-1, EN61347-2-13, EN62493 EN55015, EN61000-3-2, EN61000-3-3 (≥60% load) EN61000-4-2,3,4,5,6,11, EN61547
Weight Size	<ul style="list-style-type: none"> Kilograms Dimensions (mm) 	<ul style="list-style-type: none"> 0.25 Kg 171.5 x 54 x 20 mm