


ULTRA RUN 10W SINGLE COLOUR SIDE BEND

NEON 0612



DESCRIPTION

Our Single Colour Side Bend LED NEON FLEX 0612 is crafted from Dow Chemical SILASTIC™ ET-7021 silicone rubber, offering exceptional transparency and strength. Manufactured using an integrated extrusion moulding process with environmental protection grade silicone, this product features a unique optical light distribution design for a uniform, shadow-free lighting surface. We use a matt finish that is anti-dust and more robust against UV exposure, ensuring long-lasting performance and maintaining a clean, high-quality appearance over time.

PRODUCT SPECIFICATION

Product Code	NS0612C3
Dimensions	W:6mm, H:12mm
Cutting Interval	50mm
Bend Direction	Side Bend
Minimum Bend Radius	≥25mm
Colour Temperature ¹	2700K, 3000K, 4000K, + More
Bin/step	Single Bin / 3SDCM
Lifetime	≥50,000 hours
Environment Ta	-25°C to 55°C
IP Rating	IP67
Mounting ²	Clips and Profile
Connection ²	Injection Moulds
Certifications	UL, CE, RoHS

PERFORMANCE DATA

Power Consumption	10W/m
Supply Voltage	24V DC
Lumens/Metre ¹	428-431 Lm/m
Lumen Efficiency ¹	42.8-43.1 Lm/m
L70	161,000 hours
L80	102,000 hours
Max Length	13,000mm
Beam Angle	120°
CRI	92+
Dimmable	Yes

¹ See Page 2 for further information. More custom colour temperatures are available upon request.

² See Page 3 for further information.



UK BESPOKE MACHINE INJECTION MOULDING

Our factory-sealed ends ensure an ultra durable, waterproof and seamless installation

[FIND OUT MORE](#)



fossLED UK Operations Centre
Unit C9 & C10 Lakeside, Neptune Close,
Medway City Estate, Rochester, Kent,
ME2 4LT, United Kingdom



sales@fossled.co.uk
+44 (0)203 198 1908
www.fossled.com
V1-MS250703




SINGLE COLOUR TEMPERATURE DATA

CCT (K)	CRI	Voltage	Power (W/m)	Lumen (Lm/m)	Efficiency (Lm/W)	Unit Length (mm)	Max. Run Length (M)
2700K	92+	DC24V	10	428	42.8	50	13
3000K	92+	DC24V	10	430	43	50	13
4000K	92+	DC24V	10	431	43.1	50	13

The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.


DIMENSIONS [mm]

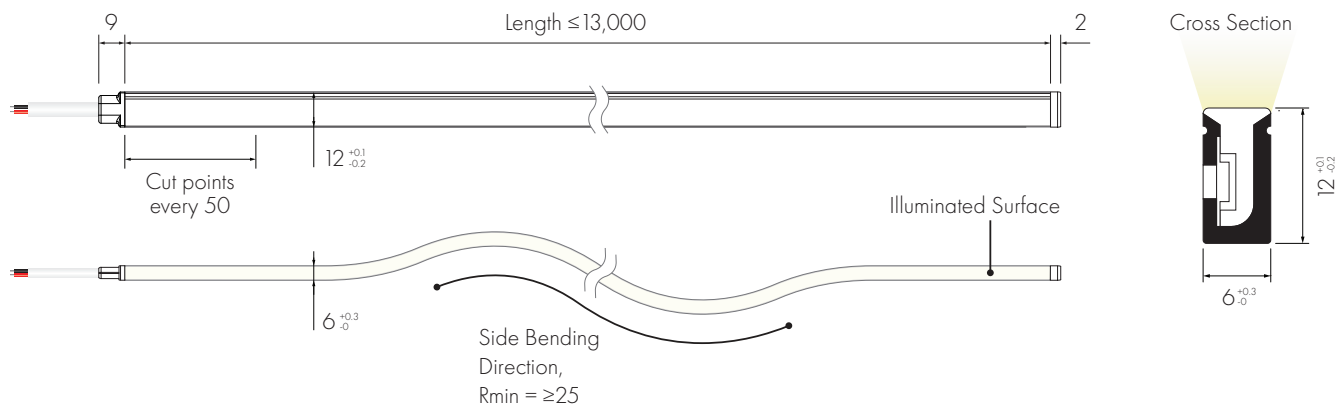


Shown with **FF** Front Feed and **EE** End Injection Moulds

CABLE FEED/END TYPES


FF/EF Front Injection Mould




FL/FR/EL/ER Side Injection Mould





FB/EB Bottom Injection Mould



EE End Injection Mould



EES End Silicone Cap

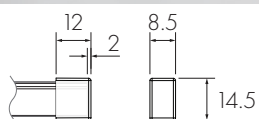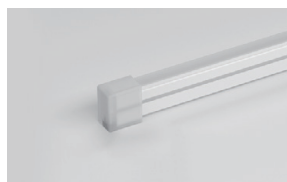

fossLED UK Operations Centre
Unit C9 & C10 Lakeside, Neptune Close,
Medway City Estate, Rochester, Kent,
ME2 4LT, United Kingdom



sales@fossled.co.uk
+44 (0)203 198 1908
www.fossled.com
V1-MS250703



MOUNTING OPTIONS

Lightweight & Durable

MC0612-8 Aluminium Clips

1 Clip supplied with M2.3 fixing screws

4 Clips recommended per metre

Robust & Long-lasting

MC0612-SS Stainless Steel Clips

1 Clip supplied with M2.3 fixing screws

4 Clips recommended per metre

Lightweight & Durable

MP0612-81M Aluminium Profile

Supplied with M2.3 fixing screws

1 metre length

Adaptive Mounting

FP0612-81M Flexible Surface Profile


Supplied with M3 fixing screws

1 metre length

CABLE OPTIONS

Cable Type	Diagram	Specification	Core	Electrical Properties
Flat White Silicone Cable		Outer 4.5mm wide x 3.3mm high/Inner cores 2 x 0.5mm ²		Red V+, Black V-

LIGHT DISTRIBUTION CURVE

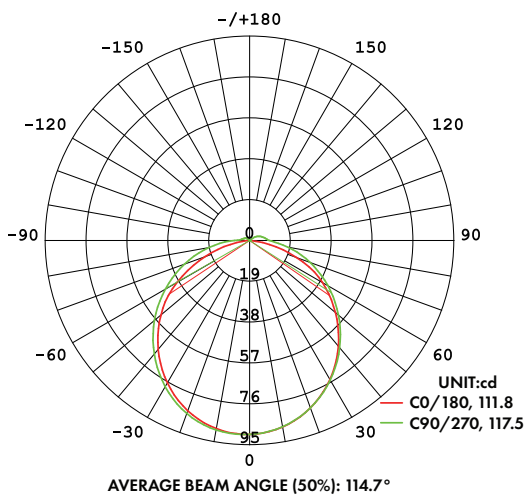

The given data is based on 24V, 10W/M, single colour with 4000k colour temperature. If you need IES files for other types please contact our sales department.

NEON CUSTOMISATION

Follow the steps below, using our Customisation Sheet, to build your custom Neon product

[GO TO CUSTOMISATION SHEET](#) →

1

Confirm Nominal Code and select the required colour temperature

Nominal Code
NS0612C3 -
Neon Side Bend 6x12mm
Single Colour Constant Current 10W

Colour Temperature

G
G 2700K
C 3000K
N 4000K + More colour temperatures are available upon request

2

Choose the Product Length

Product Length
50mm

Customised in increments set by the specified product cut points

Please note that the finished length will be effected by Feed/End Type and specified tolerances

3

Choose Feed Type options

Feed Type
FF

Feed Cable Length
1 m

Feed Cable Colour
FNF2C-0

FF Front IP67
FB Bottom IP67
FL Left Side IP67
FR Right Side IP67

Customised in 1m increments

FNF2C-0 Flat White Silicone Cable

4

Choose End Type options

End Type
EE

End Cable Length
-

End Cable Colour
-

EE End IP67
EES End Silicone Cap IP67
EF Front IP67
EB Bottom IP67
EL Left Side IP67
ER Right Side IP67

Customised in 1m increments


ENF2C-0 Flat White Silicone Cable

+

Add required Mounting options

If additional Joined Lengths are required then repeat steps 3 and 4

DEFINING FEED/END TYPES

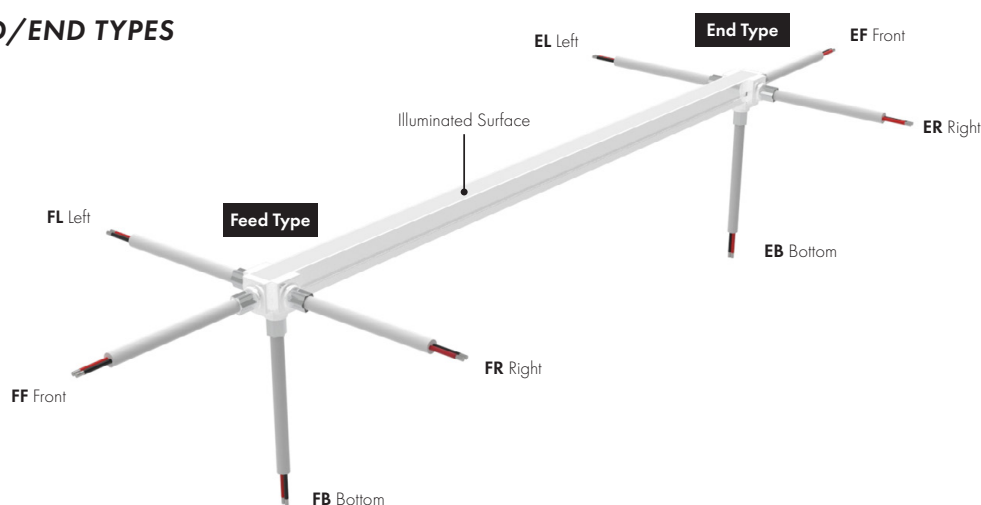

fossLED UK Operations Centre
Unit C9 & C10 Lakeside, Neptune Close,
Medway City Estate, Rochester, Kent,
ME2 4LT, United Kingdom




sales@fossled.co.uk
+44 (0)203 198 1908
www.fossled.com
V1-MS250703




INJECTION MOULDS

Our injection moulded ends provide a seamless, waterproof, and ultra-durable solution for a superior lighting solution. Whether for architectural, commercial, or outdoor lighting applications, our factory-sealed ends ensure flawless performance, easy installation, and a professional finish—*expertly manufactured at our UK factory.*

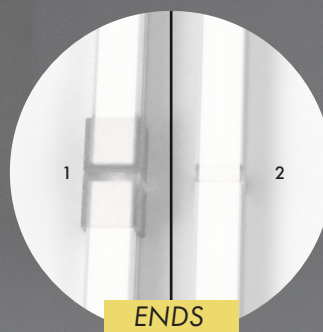

1 SILICONE CAP vs
2 INJECTION MOULD

Create a seamless finish at the end of runs and when butting two lengths together.

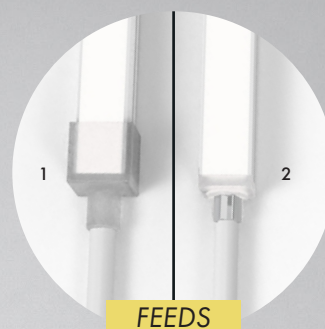

1 SILICONE CAP vs
2 INJECTION MOULD

Uniform section dimensions for effortless installation.



DURABILITY & PROTECTION

Injection moulded entries ensure a robust seal, preventing water ingress, dust contamination, and moisture via capillary action for long lasting protection.

AESTHETICS & FINISH

Injection moulded entries provide a seamless, professional finish, avoiding visible seams guaranteeing a consistent appearance across all installations.

EFFORTLESS INSTALLATION

With uniform section dimensions and no bulky connectors or uneven fittings, injection moulded ends make installation smooth, clean, and hassle-free.

fossLED UK Operations Centre
Unit C9 & C10 Lakeside, Neptune Close,
Medway City Estate, Rochester, Kent,
ME2 4LT, United Kingdom



sales@fossled.co.uk
+44 (0)203 198 1908
www.fossled.com
V1-MS250703

