

LINEAR 15W RGBW TOP BEND

NEON 1617

IP67

Single
Binning

LM
80

CRI
92+

5
Year

TM66
ASSESSED



DESCRIPTION

Our RGBW Top Bend LED NEON FLEX 1617 is crafted from Dow Chemical SILASTIC™ ET-7021 silicone rubber, offering exceptional transparency and strength. Manufactured using an integrated extrusion moulding process with environmental protection grade silicone, this product features a unique optical light distribution design for a uniform, shadow-free lighting surface. We use a matt finish that is anti-dust and more robust against UV exposure, ensuring long-lasting performance and maintaining a clean, high-quality appearance over time.

PRODUCT SPECIFICATION

Product Code	NT1617Y5
Dimensions	W: 16mm, H: 17mm
Cutting Interval	83.3mm
Bend Direction	Top Bend
Minimum Bend Radius	≥100mm
Colour Temperature ¹	RGB + W (2700K, 3000K, 4000K)
Bin/step	Single Bin
Lifetime	≥50,000 hours
Environment Ta	-25°C to 55°C
IP Rating	IP67
Mounting ²	Clips and Profile
Connection ¹	Injection Moulds
Certifications	UL, CE, RoHS

PERFORMANCE DATA

Power Consumption	15W/m
Supply Voltage	24V DC
Lumens/Metre ¹	735-759 Lm/m
Lumen Efficiency ¹	49-50.6 Lm/m
L70	63,000 hours
L80	40,000 hours
Max Length	5,000mm
Beam Angle	120°
CRI	92+
Dimmable	Yes

¹ See Page 2 for further information. More custom colour temperatures are available upon request.

² See Page 3 for further information.



UK BESPOKE MACHINE INJECTION MOULDING

Our factory-sealed ends ensure an ultra durable, waterproof and seamless installation

FIND OUT MORE



fossLED UK Operations Centre
Unit C9 & C10 Lakeside, Neptune Close,
Medway City Estate, Rochester, Kent,
ME2 4LT, United Kingdom



sales@fossled.co.uk
+44 (0)203 198 1908
www.fossled.com
V1-MS250703



RGBW COLOUR TEMPERATURE DATA

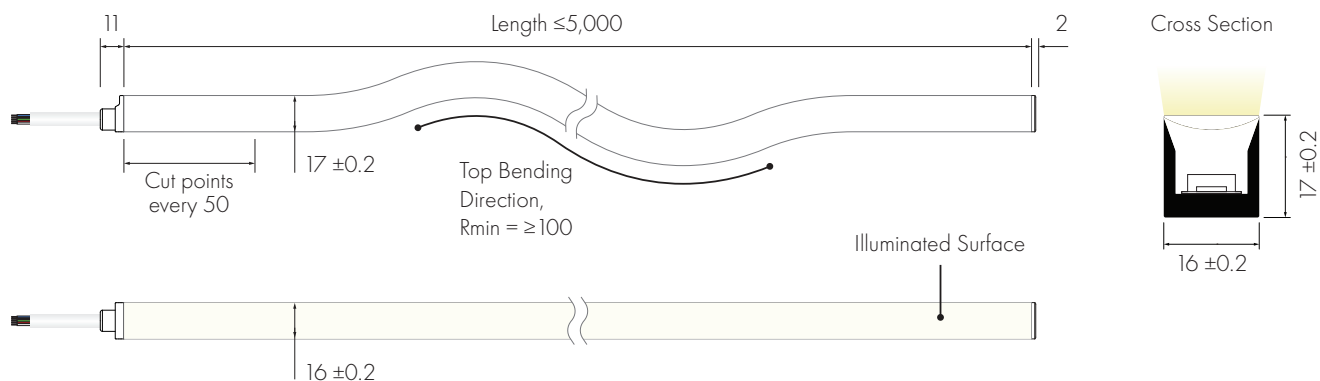
CCT (K)	CRI	Voltage	Power (W/m)	Lumen (Lm/m)	Efficiency (Lm/W)	Unit Length (mm)	Max. Run Length (M)
 R	-	DC24V	3.7	83	22	83.3	5
 G	-	DC24V	3.7	306	81.6	83.3	5
 B	-	DC24V	3.7	54	14.4	83.3	5
 2700K	92+	DC24V	3.7	261	69.6	83.3	5
 RGB + W (2700K)	-	DC24V	15	735	49	83.3	5

CCT (K)	CRI	Voltage	Power (W/m)	Lumen (Lm/m)	Efficiency (Lm/W)	Unit Length (mm)	5Max. Run Length (M)
 R	-	DC24V	3.7	83	22	83.3	5
 G	-	DC24V	3.7	306	81.6	83.3	5
 B	-	DC24V	3.7	54	14.4	83.3	5
 3000K	92+	DC24V	3.7	270	72.1	83.3	5
 RGB + W (3000K)	-	DC24V	15	749	49.9	83.3	5

CCT (K)	CRI	Voltage	Power (W/m)	Lumen (Lm/m)	Efficiency (Lm/W)	Unit Length (mm)	Max. Run Length (M)
 R	-	DC24V	3.7	83	22	83.3	5
 G	-	DC24V	3.7	306	81.6	83.3	5
 B	-	DC24V	3.7	54	14.4	83.3	5
 4000K	92+	DC24V	3.7	281	74.9	83.3	5
 RGB + W (4000K)	-	DC24V	15	759	50.6	83.3	5

The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.


DIMENSIONS [mm]




Shown with **FF** Front Feed and **EE** End Injection Moulds

CABLE FEED/END TYPES


FF/EF Front Injection Mould




FL/FR/EL/ER Side Injection Mould





FB/EB Bottom Injection Mould









EE End Injection Mould









EES End Silicone Cap




MOUNTING OPTIONS


Lightweight & Durable MC1617-8 Aluminium Clips  1 Clip supplied with M3 fixing screws 4 Clips recommended per metre 	Discreet & Moisture Proof MC1617-CL Transparent Clips  1 Clip supplied with M3 fixing screws 4 Clips recommended per metre 	Lightweight & Durable MP1617-81M Aluminium Profile  Supplied with M3 fixing screws 1 metre length 	Discreet & Moisture Proof MP1617-CL1M Transparent Plastic Profile  Supplied with M3 fixing screws 1 metre length 
--	---	--	---

Adaptive Mounting FP1617-81M Flexible Surface Profile  Supplied with M3 fixing screws 1 metre length 	Adaptive & Flush PFP1617-81M Flexible Plaster In  Supplied with M3 fixing screws 1 metre length 	Edge Integration SPFP1617-81M One Sided Flexible Plaster In  Supplied with M3 fixing screws 1 metre length 
--	---	--

CABLE OPTIONS

Cable Type	Diagram	Specification	Core	Electrical Properties
White Silicone Cable		Outer Ø6.5mm/Inner cores Red/Black: 0.5mm ² , Green/Blue/White: 0.34mm ²		Black V+, White W, Blue B, Green G, Red R

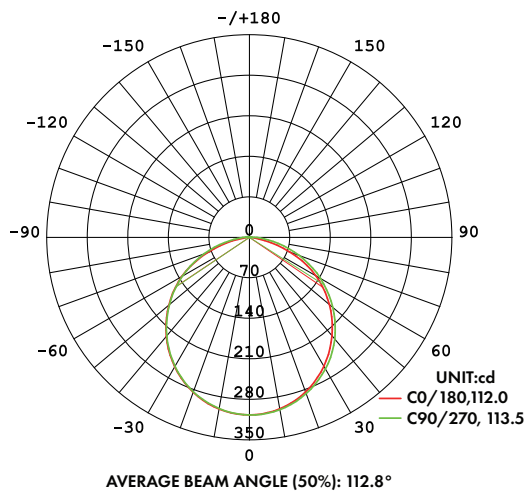LIGHT DISTRIBUTION CURVE



The given data is based on 24V, 15W/M, single colour with 4000k colour temperature.
If you need IES files for other types please contact our sales department.

NEON CUSTOMISATION

Follow the steps below, using our Customisation Sheet, to build your custom Neon product

[GO TO CUSTOMISATION SHEET](#) →

1

Confirm Nominal Code and select the required colour temperature

Nominal Code

NT1617Y5 -

Neon Top Bend 16x17mm
RGBW 15W

Colour Temperature

Y0

 **Y0** RGB + W (2700K)
 **Y** RGB + W (3000K)
 **Y1** RGB + W (4000K)

2

Choose the Product Length

Product Length

50mm

Customised in increments set by the specified product cut points

Please note that the finished length will be effected by Feed/End Type and specified tolerances

3

Choose Feed Type options

Feed Type

FF

FF Front IP67
FB Bottom IP67
FL Left Side IP67
FR Right Side IP67

Feed Cable Length

1m

Customised in 1m increments

Feed Cable Colour

FNR5C-0

 **FNR5C-0** Feed White Silicone Cable

4

Choose End Type options

End Type

EE

EE End IP67
EES End Silicone Cap IP67
EF Front IP67
EB Bottom IP67
EL Left Side IP67
ER Right Side IP67

End Cable Length

-

Customised in 1m increments

End Cable Colour


-

 **ENR5C-0** End White Silicone Cable

+

Add required Mounting options
If additional Joined Lengths are required then repeat steps 3 and 4

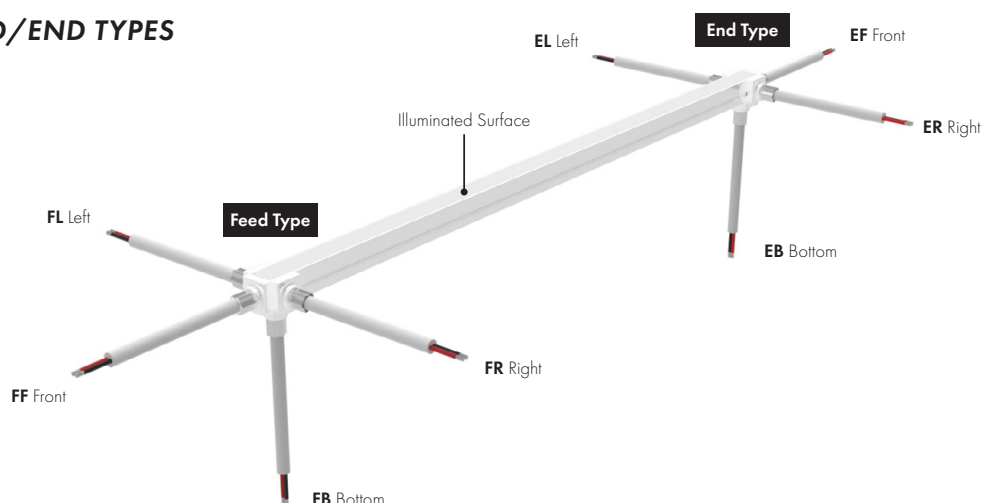DEFINING FEED/END TYPES



fossLED UK Operations Centre
Unit C9 & C10 Lakeside, Neptune Close,
Medway City Estate, Rochester, Kent,
ME2 4LT, United Kingdom




sales@fossled.co.uk
+44 (0)203 198 1908
www.fossled.com
V1-MS250703



INJECTION MOULDS

Our injection moulded ends provide a seamless, waterproof, and ultra-durable solution for a superior lighting solution. Whether for architectural, commercial, or outdoor lighting applications, our factory-sealed ends ensure flawless performance, easy installation, and a professional finish—*expertly manufactured at our UK factory.*




- 1 SILICONE CAP vs
2 INJECTION MOULD

Create a seamless finish at the end of runs and when butting two lengths together.

ENDS

- 1 SILICONE CAP vs
2 INJECTION MOULD

Uniform section dimensions for effortless installation.



FEEDS

DURABILITY & PROTECTION

Injection moulded entries ensure a robust seal, preventing water ingress, dust contamination, and moisture via capillary action for long lasting protection.

AESTHETICS & FINISH

Injection moulded entries provide a seamless, professional finish, avoiding visible seams guaranteeing a consistent appearance across all installations.

EFFORTLESS INSTALLATION

With uniform section dimensions and no bulky connectors or uneven fittings, injection moulded ends make installation smooth, clean, and hassle-free.

fossLED UK Operations Centre
Unit C9 & C10 Lakeside, Neptune Close,
Medway City Estate, Rochester, Kent,
ME2 4LT, United Kingdom



sales@fossled.co.uk
+44 (0)203 198 1908
www.fossled.com
V1-MS250703

