

LINEAR 15W RGBW TOP BEND

NEON 1617



DESCRIPTION

Our RGBW Top Bend LED NEON FLEX 1617 is crafted from Dow Chemical SILASTIC™ ET-7021 silicone rubber, offering exceptional transparency and strength. Manufactured using an integrated extrusion moulding process with environmental protection grade silicone, this product features a unique optical light distribution design for a uniform, shadow-free lighting surface. We use a matt finish that is anti-dust and more robust against UV exposure, ensuring long-lasting performance and maintaining a clean, high-quality appearance over time.

PRODUCT SPECIFICATION

Product Code	NT1617Y5
Dimensions	W: 16mm, H: 17mm
Cutting Interval	83.3mm
Bend Direction	Top Bend
Minimum Bend Radius	≥100mm
Colour Temperature ¹	RGB + W (2700K, 3000K, 4000K)
Bin/step	Single Bin
Lifetime	≥50,000 hours
Environment T _a	-25°C to 55°C
IP Rating	IP67
Mounting ²	Clips and Profile
Connection ¹	Injection Moulds
Certifications	UL, CE, RoHS

PERFORMANCE DATA

Power Consumption	15W/m
Supply Voltage	24V DC
Lumens/Metre ¹	735-759 Lm/m
Lumen Efficiency ¹	49-50.6 Lm/m
L70	63,000 hours
L80	40,000 hours
Max Length	5,000mm
Beam Angle	120°
CRI	92+
Dimmable	Yes

¹ See Page 2 for further information. More custom colour temperatures are available upon request.

² See Page 3 for further information.



UK BESPOKE MACHINE INJECTION MOULDING

Our factory-sealed ends ensure an ultra durable, waterproof and seamless installation

FIND OUT MORE








fossLED UK Operations Centre
Unit C9 & C10 Lakeside, Neptune Close,
Medway City Estate, Rochester, Kent,
ME2 4LT, United Kingdom













sales@fossled.co.uk
+44 (0)203 198 1908
www.fossled.com
V2-MS260511



RGBW COLOUR TEMPERATURE DATA


CCT (K)	CRI	Voltage	Power (W/m)	Lumen (Lm/m)	Efficiency (Lm/W)	Unit Length (mm)	Max. Run Length (M)
 R	-	DC24V	3.7	83	22	83.3	5
 G	-	DC24V	3.7	306	81.6	83.3	5
 B	-	DC24V	3.7	54	14.4	83.3	5
 2700K	92+	DC24V	3.7	261	69.6	83.3	5
 RGB + W (2700K)	-	DC24V	15	735	49	83.3	5

CCT (K)	CRI	Voltage	Power (W/m)	Lumen (Lm/m)	Efficiency (Lm/W)	Unit Length (mm)	5Max. Run Length (M)
 R	-	DC24V	3.7	83	22	83.3	5
 G	-	DC24V	3.7	306	81.6	83.3	5
 B	-	DC24V	3.7	54	14.4	83.3	5
 3000K	92+	DC24V	3.7	270	72.1	83.3	5
 RGB + W (3000K)	-	DC24V	15	749	49.9	83.3	5

CCT (K)	CRI	Voltage	Power (W/m)	Lumen (Lm/m)	Efficiency (Lm/W)	Unit Length (mm)	Max. Run Length (M)
 R	-	DC24V	3.7	83	22	83.3	5
 G	-	DC24V	3.7	306	81.6	83.3	5
 B	-	DC24V	3.7	54	14.4	83.3	5
 4000K	92+	DC24V	3.7	281	74.9	83.3	5
 RGB + W (4000K)	-	DC24V	15	759	50.6	83.3	5

The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.


DIMENSIONS [mm]

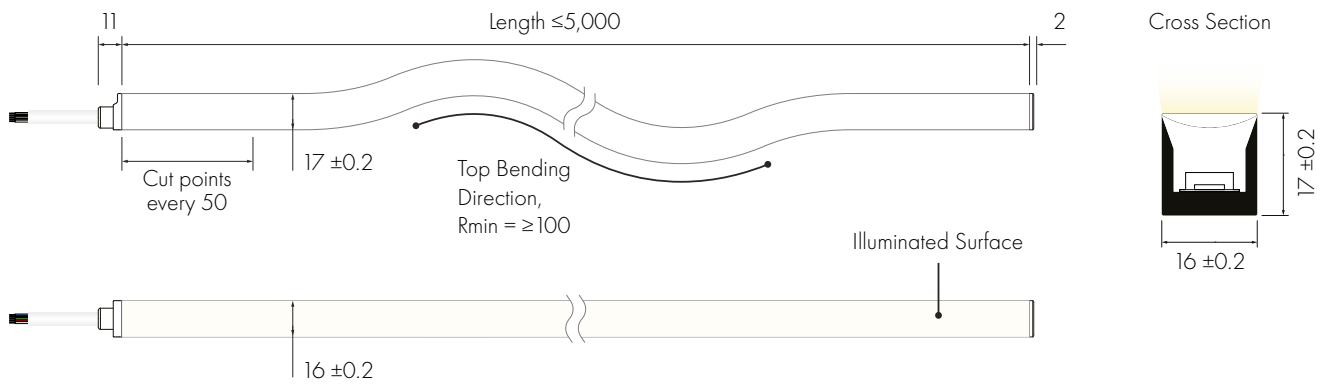


Shown with **FF** Front Feed and **EE** End Injection Moulds

CABLE FEED/END TYPES


FF/EF Front Injection Mould




FL/FR/EL/ER Side Injection Mould




FB/EB Bottom Injection Mould



EE End Injection Mould



EES End Silicone Cap



NEON CUSTOMISATION

Follow the steps below, using our Customisation Sheet, to build your custom Neon product

[GO TO CUSTOMISATION SHEET](#) →

1

Confirm Nominal Code and select the required colour temperature

Nominal Code	Colour Temperature
NT1617Y5 - Neon Top Bend 16x17mm RGBW 15W	Y0 Y0 RGB + W (2700K) Y RGB + W (3000K) Y1 RGB + W (4000K)

2

Choose the Product Length

Product Length
83.3mm

Customised in increments set by the specified product cut points

Please note that the finished length will be effected by Feed/End Type and specified tolerances

3

Choose Feed Type options

Feed Type	Feed Cable Length	Feed Cable Colour
FF FF Front IP67 FB Bottom IP67 FL Left Side IP67 FR Right Side IP67	1m Customised in 1m increments	NR5C-0 NR5C-0 Feed White Silicone Cable

4


Choose End Type options

End Type	End Cable Length	End Cable Colour
EE EE End IP67 EES End Silicone Cap IP67 EF Front IP67 EB Bottom IP67 EL Left Side IP67 ER Right Side IP67	- Customised in 1m increments	- NR5C-0 End White Silicone Cable

+


Add required Mounting options
If additional Joined Lengths are required then repeat steps 3 and 4

DEFINING FEED/END TYPES

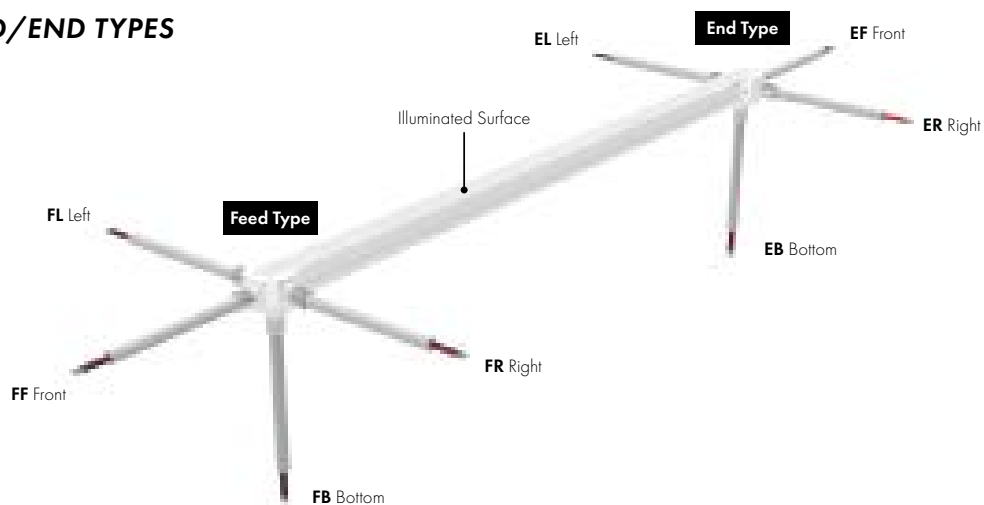


INJECTION MOULDS

Our injection moulded ends provide a seamless, waterproof, and ultra-durable solution for a superior lighting solution. Whether for architectural, commercial, or outdoor lighting applications, our factory-sealed ends ensure flawless performance, easy installation, and a professional finish—*expertly manufactured at our UK factory.*



1 **SILICONE CAP** vs
2 **INJECTION MOULD**

Create a seamless finish at the end of runs and when butting two lengths together.

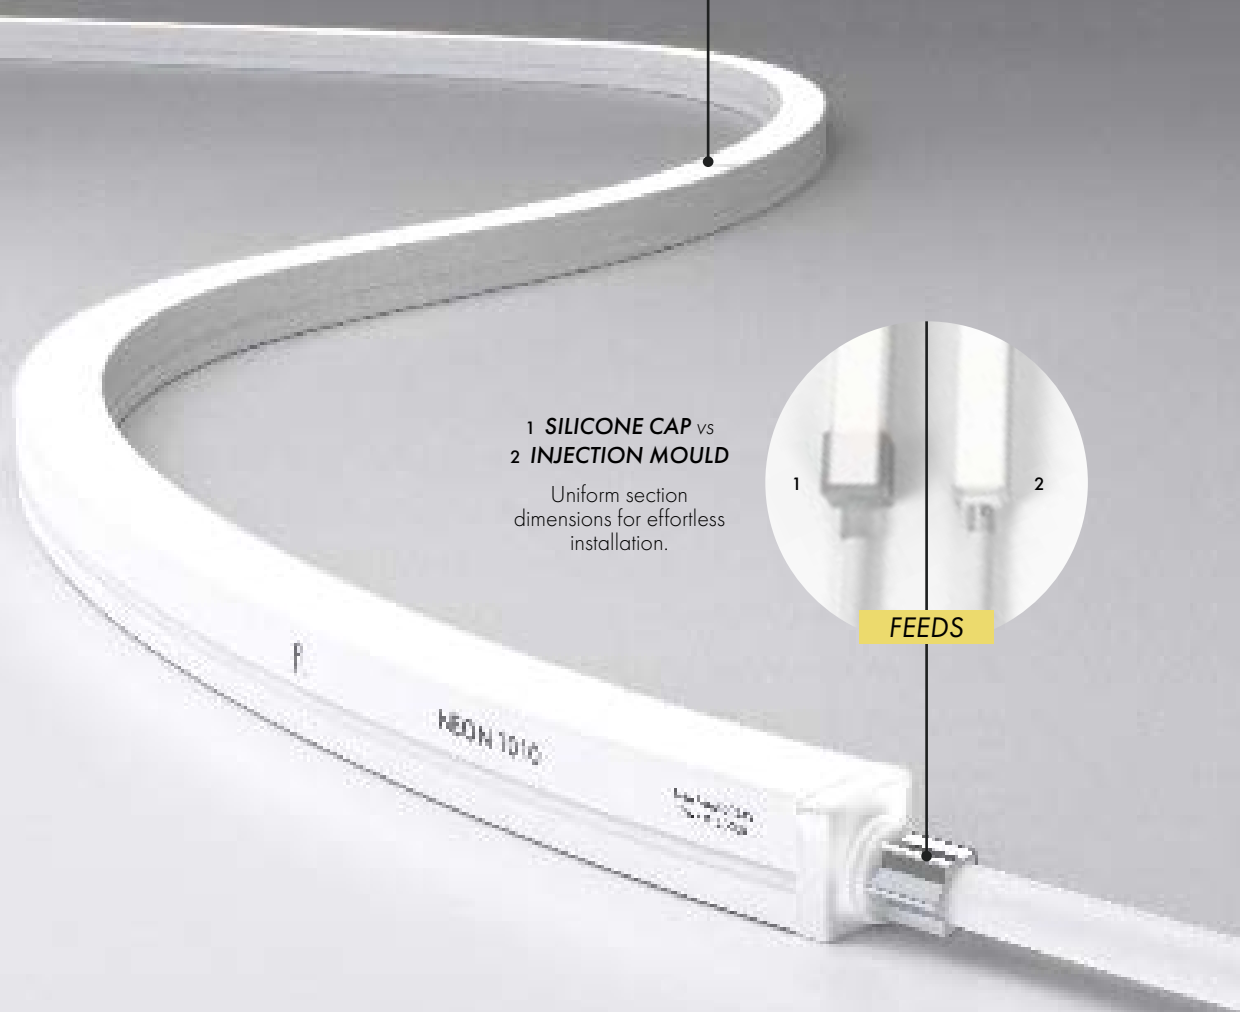

1 **SILICONE CAP** vs
2 **INJECTION MOULD**

Uniform section dimensions for effortless installation.

FEEDS

DURABILITY & PROTECTION

Injection moulded entries ensure a robust seal, preventing water ingress, dust contamination, and moisture via capillary action for long lasting protection.

AESTHETICS & FINISH

Injection moulded entries provide a seamless, professional finish, avoiding visible seams guaranteeing a consistent appearance across all installations.

EFFORTLESS INSTALLATION

With uniform section dimensions and no bulky connectors or uneven fittings, injection moulded ends make installation smooth, clean, and hassle-free.