


4 CORE FLAT CABLE

5m pack of 4 x 0.52mm² flat cable (black/red/green/blue)

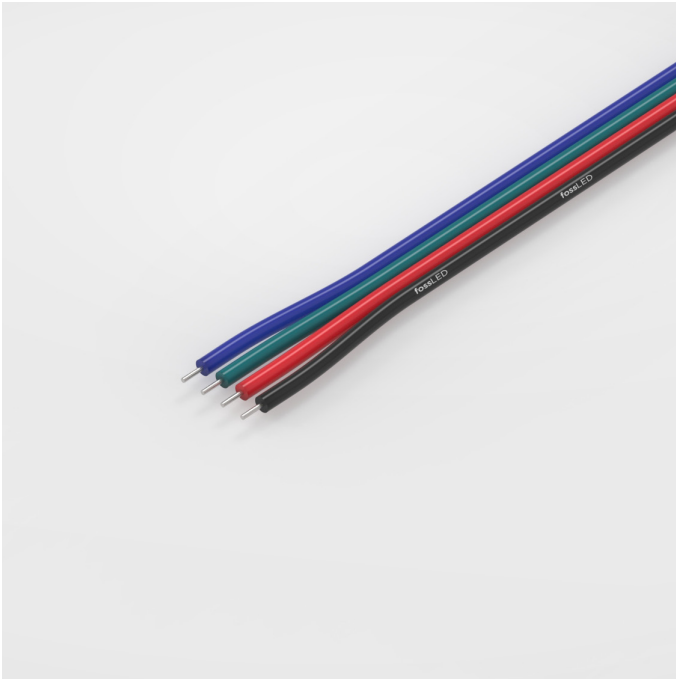

Product reference: **4C50-5M-V2**

UL 2468 certified (File E350945)

Stranded bare copper (26/0.16 mm $\approx$ 0.52 mm²)

PVC insulation, black/red/green/blue parallel style

Flame retardant (VW-1), RoHS compliant

ELECTRICAL SPECIFICATION

Voltage:	300 V
Temperature:	-20°C to +80°C
Conductor resistance:	$\leq 21.4 \Omega/\text{km}$
Insulation resistance:	$\geq 20 \text{ M}\Omega \cdot \text{km}$
Dielectric strength:	2000 V AC / 1 min

MECHANICAL SPECIFICATION

Cable gauge:	4 x 0.52mm ² / 20AWG (black/red/green/blue)
Cable Length	5m
OD:	2.0 mm $\pm$ 0.2 mm
Insulation thickness:	0.38 mm