


CORNER CONNECTOR

Tuneable White COB 10mm - 5cm Lead

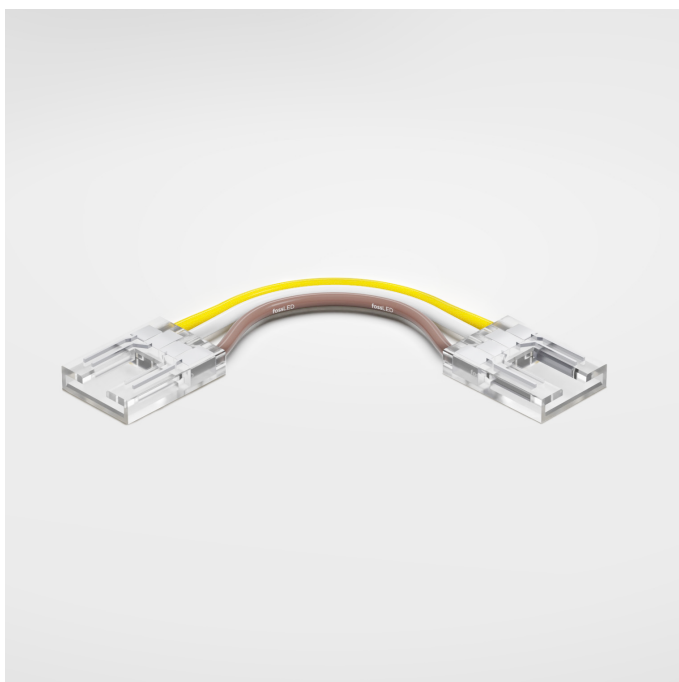

IP20

DC
24V

5
EXT

Our innovative Mini connectors are compatible with COB Tuneable White 10mm strips and designed to fit into even the slimmest aluminium extrusions.

These Corner connectors are used to go around bends; simply insert the strip into the corresponding terminals and crimp with pliers to pierce PCB components for a secure finish- **see page 2 for full instructions.**

PRODUCT SPECIFICATION


COMPATIBLE STRIP SERIES (IP20):	COB
STRIP PCB WIDTH:	10mm
VOLTAGE RANGE:	DC 3-24V
MAX LOAD RATING:	96W (24V)
WIRE ACCEPTED:	Pre-Flexed with a 5cm lead (brown/white/yellow)
DIMENSIONS:	L15.6*W11.6*H3.3mm
PRODUCT REFERENCE:	FLSC10TML-5CM

CORNER CONNECTOR

Tuneable White COB 10mm - 5cm Lead


USING A CORNER CONNECTOR

Our corner connectors eliminate the need for soldering. Please follow the steps explained below, repeating the same process for each connector:

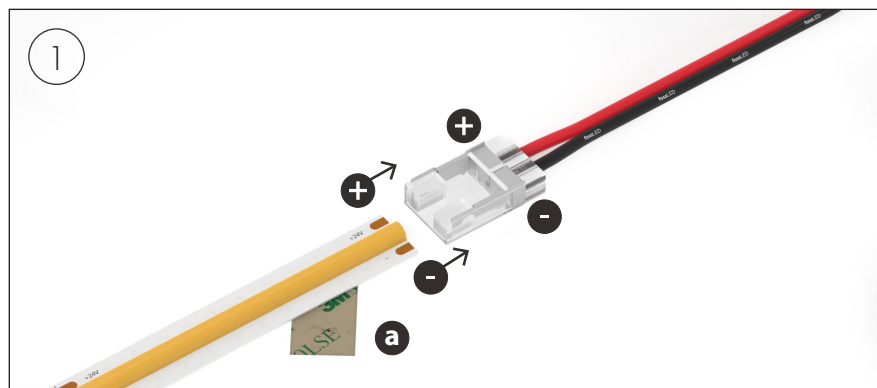


a Peel back the adhesive tape leaving a sufficient amount of bare strip to insert into the clip. Make sure you peel back the tape and accompanying adhesive layer leaving this to re-apply once the connection is complete.

+ **-** Align the LED Strip ensuring the polarities match with the feed cable.

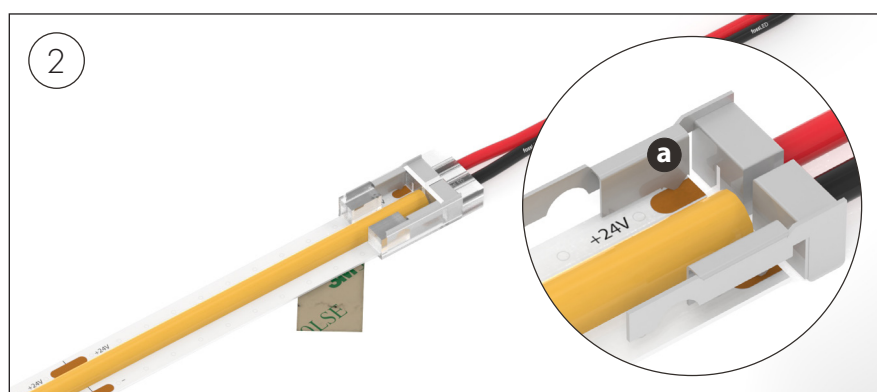

a Insert the LED Strip into the corresponding terminals ensuring the strip is fitted correctly so that the copper pads line up with the clip connector teeth.

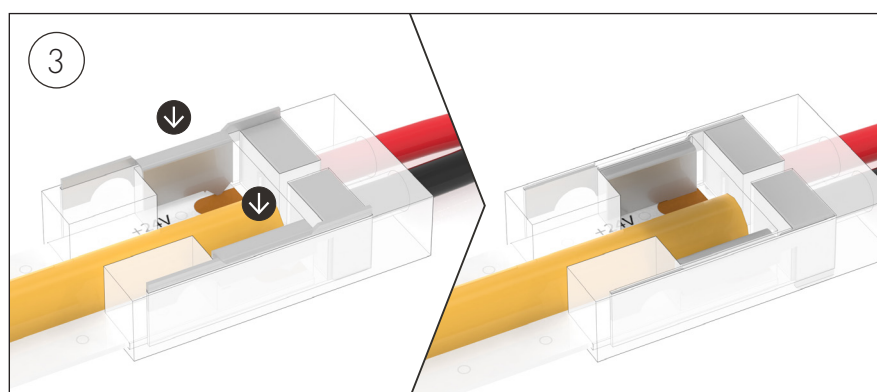

↓ Crimp down on the teeth prongs with pliers to pierce your LED Strip PCB leaving the prongs flush with the connector housing. Check the LED Strip is locked in and the connection is secure.

Re-apply the adhesive tape under the clip connector ready for installation.

Note: Care must be taken when crimping so as not to crack the outer housing.

Note: Images are for illustration purposes only and may not represent the exact connector model supplied.